



Inspection Notice

Rescue Technology Corona FR Truck / Escape Belt
Part Number: 701122, 701132, 701152,
701122H, 701132H, 701152H

Reason for Notice


Rescue Technology has received a single notice of an instance where the webbing of the Corona FR Truck / Escape Belt was not properly threaded through the double locking snap hook. There are no reported injuries associated with this issue, but out of caution we wanted to notify potential users of this issue.

Upon initial review, it is limited to a small number of Corona FR Truck / Escape Belt. It has been determined that with careful inspection these belts can be easily identified in the field. This inspection notice is limited to a small **production batch (B8022) of 18 units from March, 2015**. Refer to the labeling on the belt to find the production batch and date.

Inspection Procedure

Inspect the double locking snap hook to make sure the webbing is correctly looped through the snap and that it is properly sewn to the Corona FR Truck / Escape Belt. The image below shows the proper way the webbing threads through the snap hook.

Correct webbing placement: Single loop of webbing passes around bar on the snap

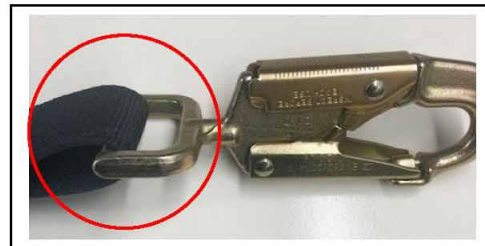

Corrective action

If the webbing/snap interface on your belt does not match the above photos, or if you wish for us to perform the inspection, please call Rescue Technology for a return authorization number to send back any affected products. We apologize for any inconvenience caused by this issue.

Rescue Technology has reviewed our production processes and has implemented any required modifications in the manufacturing and inspection process for this Corona FR Truck / Escape Belt to eliminate the possibility of this occurring in the future.