

3AA

INTRANT™ DUAL-LIGHT™ ANGLE LIGHT



EXCLUSIVE
45°
DOWNWARD FLOODLIGHT


HEAD ROTATES 90°



Head rotates 90° - directing beam exactly where it's needed most



45° downward floodlight lights an 8 foot walking area



Easy-to-use with gloves, the large switches independently control separate LEDs



Heavy-duty, clip and V-ring securely holds tight to gear in any situation



FL1 STANDARD	HIGH	MEDIUM	LOW
	200 LUMENS	110 LUMENS	60 LUMENS
	11h	18h	33h
	420m	250m	187m
	38000cd	15625cd	8750cd



AVAILABLE IN MULTIPLE COLORS.



200 LUMENS

1-800-233-2155 · 1-469-326-9400 · nightstick.com

INTRANT™**DUAL-LIGHT™ ANGLE LIGHT****3AA****ITEM NUMBER/UPC**

XPP-5566RX (Red), 0 17398 80629 9
 XPP-5566GX (Green), 0 17398 80628 2

MARKET APPLICATIONS

Hazardous work environments, fire, rescue, industrial and automotive

CASE MATERIAL

- Glass filled nylon polymer

LUMENS/RUNTIME**FLASHLIGHT**

- HIGH: 200L, 11 hrs. runtime
- MEDIUM: 110L, 18 hrs. runtime
- LOW: 60L, 33 hrs. runtime
- STROBE

FLOODLIGHT

- HIGH: 100L, 11 hrs. runtime
- MEDIUM: 40L, 18 hrs. runtime
- SURVIVAL: 20L, 33 hrs. runtime

DUAL-LIGHT

- 205L, 11 hrs. runtime

CANDELA**FLASHLIGHT**

- HIGH: 38,000
- MEDIUM: 15,625
- LOW: 8,750

BEAM DISTANCE**FLASHLIGHT**

- HIGH: 420m
- MEDIUM: 250m
- LOW: 187m

WATER RATING

- IP-67 (dustproof and waterproof)

DROP RATING

- 2 meters

DIMENSIONS

- LENGTH: 6.6 in (168mm)
- WIDTH: 2.6 in (66mm)
- DEPTH: 2.6 in (66mm)
- BEZEL DIAMETER: 2.1 in (53mm)
- WEIGHT: 11.1 oz (315g)(with batteries)

BATTERY





- 3AA batteries (included)


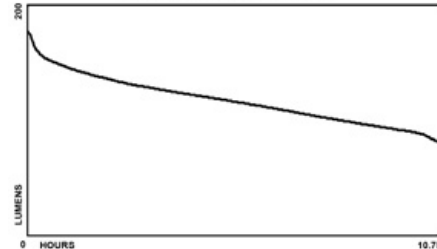
WARRANTY

- Limited Lifetime Warranty

WHAT'S INCLUDED

- Angle light
- AA battery carrier
- 3AA batteries
- Instruction manual

FL 1 STANDARD	HIGH	MEDIUM	LOW
	200 LUMENS	110 LUMENS	60 LUMENS
	11h	18h	33h
	420m	250m	187m
	38000cd	15625cd	8750cd

**XPP-5566 PERFORMANCE CURVE**

Bayco Products, Inc. XPP-5566
 640 S. Sanden Blvd., Wylie, TX 75098

Ex ia FLASHLIGHT FOR USE IN HAZARDOUS LOCATIONS

For use with Bayco Li-ion Battery Pack 5568-BATT or
 5566-CARRIER with 3 AA Energizer Type EN91 or E91
 batteries only



LISTED
 E 114304
 ID 4003544

ELECTRICAL SAFETY
 INTRINSICALLY SAFE
 SECURITE INTRINSEQUE

CE 0359
 Control Drawing: 5568-CERT-DWG1-03

CLASS I DIV 1 GRPS A-D T3
 CLASS II & III DIV1 GRPS E-G T135°C
 CLASS I ZONE 0 AEx ia IIC T3 Ga
 Ⓢ I M1 Ex ia op is I Ma
 Ⓢ II 1 G Ex ia op is IIC T3 Ga

Ex ia op is I Ma
 Ex ia op is IIC T3 Ga
 DEMKO 17 ATEX 1927
 IECEX UL 17.0082
 -20°C ≤ Tamb ≤ +40°C
 1.5V/Cell Alkaline
 3.7V/Cell Li-ion
 IP-67
 Um: 10V



AVAILABLE IN MULTIPLE COLORS.

