

LI-ION RECHARGEABLE


XPR-5586GX

INTRINSICALLY SAFE DUAL-LIGHT™ LANTERN


NIGHTSTICK®
Life Depends on Light™

900

**DUAL-LIGHT™
LUMENS**

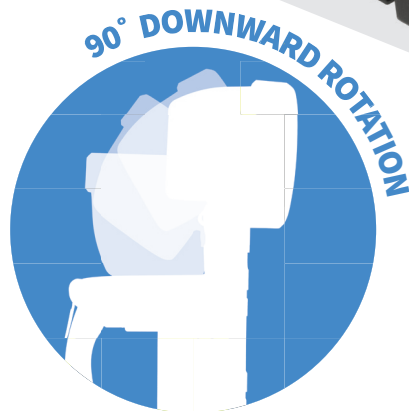

Bottom-facing flood provides 650 lumens of soft unfocused light



Rear red safety lights provide visibility for machinery operators and driver safety.



Convenient locking snap-in charger included



Carry strap with seat belt style buckle for additional hands-free use

FL 1 STANDARD	HIGH	MEDIUM	LOW
	650 LUMENS	380 LUMENS	25 LUMENS
	9.5h	15.5h	150h
	388m	312m	83m
	37600cd	24400cd	1696cd
	2m		1m

650 LUMENS



1-800-233-2155 • 1-469-326-9400 • nightstick.com

© 2019 Bayco Products Inc. Items shown are intended as a visual representation for informational purposes only and are subject to change without notice. Visit nightstick.com for product updates.

DUAL-LIGHT™ LANTERN

LI-ION RECHARGEABLE

ITEM NUMBER/UPC

XPR-5586GX, UPC# 017398807036

MARKET APPLICATIONS

Hazardous work environments, fire, rescue, industrial and automotive

CERTIFICATIONS

- cULus, CE, Meets requirements of NFPA-1971-8.6 (2013), Charger meets the requirements of NFPA-1901-14.1.10.2 (2016)

CASE MATERIAL

- Glass filled nylon polymer

LUMENS/RUNTIME

FLASHLIGHT

- HIGH: 650L, 9.5 hrs. runtime
- MEDIUM: 380, 15.5 hrs. runtime
- LOW: 25L, 150 hrs. runtime

FLOODLIGHT

- HIGH: 650L, 9.5 hrs. runtime
- MEDIUM: 380, 15.5 hrs. runtime
- LOW: 25L, 150 hrs. runtime

DUAL-LIGHT

- HIGH: 900L, 7.75 hrs. runtime

CANDELA

FLASHLIGHT

- HIGH: 37,600
- MEDIUM: 24,400
- LOW: 1,696

BEAM DISTANCE

FLASHLIGHT

- HIGH: 388m
- MEDIUM: 312m
- LOW: 83m

WATER RATING

- IP-67 (dustproof and waterproof)

DROP RATING

- 2 meters

DIMENSIONS

- LENGTH: 10.25 in / 26 cm
- WIDTH: 4.25 in / 10.8 cm
- DEPTH: 5.5 in / 14 cm
- WEIGHT: 2 lbs. 13.3 oz. / 1283 g

BATTERY

- Rechargeable Li-ion battery pack

WARRANTY

- Limited lifetime warranty

WHAT'S INCLUDED

- Lantern
- Li-ion rechargeable battery pack
- Locking snap-in charger (5586-CHGR1)
- AC & DC power supply
- Removable shoulder strap
- Instruction manual

FL1 STANDARD	HIGH	MEDIUM	LOW
	650 LUMENS	380 LUMENS	25 LUMENS
	9.5h	15.5h	150h
	388m	312m	83m
	37600cd	24400cd	1696cd

Bayco Products, Inc. XPR-5586
Ex ia FLASHLIGHT FOR USE IN HAZARDOUS LOCATIONS
UL listed for use with Bayco Li-ion Battery Pack 5586-BATT

LISTED
E 467756
ID 4003544
INTRINSICALLY SAFE
SECURITE INTRINSEQUE

CLASS I DIV 1 GRPS A-D T4
CLASS II & III DIV1 GRPS E-G T135°C
CLASS I ZONE 0 GROUP IIC
-10°C ≤ Tamb ≤ +40°C
3.7V/Cell Li-ion

CE 0359 SEE INSTRUCTION MANUAL
VOIR MANUEL MFG MM-YY

