


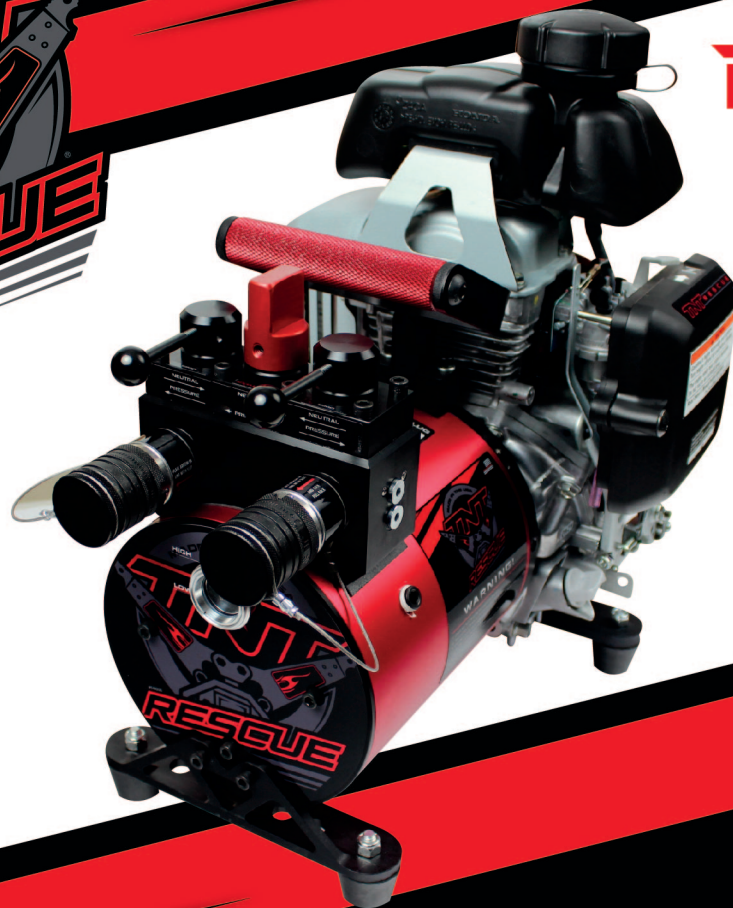

NT3.0

NT3.0

TECHNICAL SPECS

	STANDARD	METRIC
MAX. WORKING PRESSURE	10,500 PSI	724 BAR
LENGTH	19.00 IN	482.6 MM
WIDTH	12.00 IN	304.8 MM
HEIGHT	20.90 IN	530.8 MM
WEIGHT	51.8 LBS	23.5 KG
MOTOR	GX100 4 STROKE	
DISPLACEMENT	98 CC	
FUEL TANK CAPACITY	0.32 US GALLON	1.2 LITER
APPROXIMATE RUN TIME	2.0 HOURS	
ENGINE OIL	SEE HONDA'S OWNER'S MANUAL	
HYDRAULIC PUMP	2 STAGE RADIAL PISTON OVER PISTON	
TOOL OPERATION	2 TOOL SIMO OR 1 TOOL ACCELERATOR	
RESERVOIR CAPACITY	0.675 US GALLON	2.5 LITER
MFG. TO NFPA 1936-2015	YES	

SIMULTANEOUS MODE (PER TOOL)

	STANDARD	METRIC
1ST STAGE SETTING	3,200 PSI	241 BAR
1ST STAGE FLOW	110 CU IN/MIN	1,802.6 CC/MIN
2ND STAGE SETTING	10,500 PSI	724 BAR
2ND STAGE FLOW	55 CU IN/MIN	901.2 CC/MIN

ALTERNATING ACCELERATION MODE (PER TOOL)

	STANDARD	METRIC
1ST STAGE SETTING	3,200 PSI	241 BAR
1ST STAGE FLOW	220 CU IN/MIN	3,605.2 CC/MIN
2ND STAGE SETTING	10,500 PSI	724 BAR
2ND STAGE FLOW	110 CU IN/MIN	1,802.6 CC/MIN

TNT RESCUE SYSTEMS, INC.
2490 West Oak Street
Ashippun, WI 53003
www.TNTRESCUE.com

